

2

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 08-210447

(43)Date of publication of application : 20.08.1996

(51)Int.Cl.

F16H 7/12
F02B 67/06

(21)Application number : 07-017223

(71)Applicant : NIPPON SEIKO KK

(22)Date of filing : 03.02.1995


(72)Inventor : SAKAI KOICHI
SUZUKI HIROSHI

(54) AUTOTENSIONER

(57)Abstract:

PURPOSE: To easily surely adjust preset tension of an autotensioner.

CONSTITUTION: Here are respectively provided a through hole 25 in a rocking arm 13 and a slot 24 in a center part of an inner ring member 16 of supporting a pulley 5. This slot 24 is formed in a circular arc shape with a pivotal shaft, which is the rocking center of the rocking arm 13, rocking as the center. In the case of supporting the inner ring member 16 to the rocking arm 13, a nut 22 is screwed to be tightened to a bolt 21 inserted to each of these holes 24, 25. In the case of adjusting preset tension, in a condition that this bolt 21 is loosened, the pulley 5 is displaced in a range of the slot 24. When the pulley 5 leads to a desired position, the bolt 21 and the nut 22 are tightened.

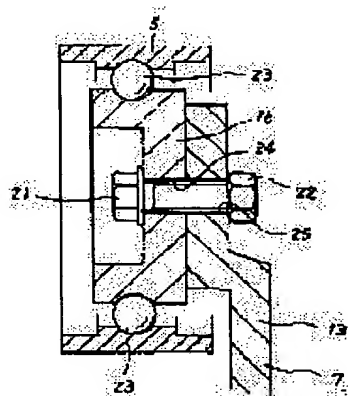

LEGAL STATUS

[Date of request for examination] 04.12.2001

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number] 3341515

[Date of registration] 23.08.2002

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]